

Medical Approved Switching Power Adaptor

EWF0616-Series Wall Plug-in Type

6~16Watts, Single Output

Features:

- Low standby power 0.3W max
- Portable mechanical design
- Interchangeable AC plugs are available for Australia, China, Europe, UK,USA
- Safety standard accordance to UL60950,UL2601,CSA60950,CSA601,EN60950,EN60601
- Efficiency 60% typ.at full load

Electrical Data:


1. Universal Input: 100-240VAC 50~60Hz
2. AC input current:0.4A RMS
3. Load Regulation: ±5%
4. MTBF:50,000hours at maximum load levels and an ambient temperature of 25°C (in correspondence with MIL-HDBK-217)

Environmental Data:

1. Operating Temperature: 0°C to 40°C
2. Storage Temperature: -20°C to 85°C
3. Humidity: 5% to 95% non condensing

Mechanical Data:

1. Weight: 122gms (not including AC plug)
2. Size:72.0(L)*42.5(W)*26.0(H)mm Approx.
3. Output connector: Optional

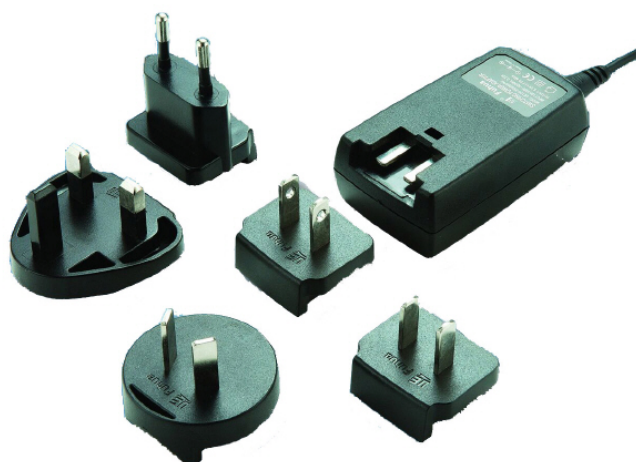

Model	O/P Voltage (V)	O/P Current (A)	Ripple(mV)	Remarks
EWF0616-300200	3.00	0.10~2.00	50	
EWF0616-400200	4.00	0.10~2.00	50	
EWF0616 -600200	6.00	0.10~2.00	100	
EWF0616 -700170	7.00	0.10~1.70	100	
EWF0616 -800130	8.00	0.10~1.30	100	
EWF0616 -900130	9.00	0.10~1.30	100	
EWF0616 -120125	12.0	0.10~1.25	100	
EWF0616 -138100	13.8	0.10~1.00	150	
EWF0616 -150090	15.0	0.10~0.90	150	
EWF0616 -180080	18.0	0.10~0.80	200	
EWF0616-240063	24.0	0.10~0.63	200	

Note: This list doesn't include the complete models, if you need output voltage & current different from the above, please feel free to e-mail us via sales@easyway-electronics.com or easyway06@gmail.com .

EasyWay Electronics Co., Ltd.

Add: Room 201, Flat104,88 Baoming Road, Shanghai, China. Zip: 201101
 Tel: 86 21 6461 9409 Fax: 86 21 5488 1949
 E-mail: sales@easyway-electronics.com <http://www.easyway-electronics.com>